




Chain Slings and Accessories

Offering Safety Material

HET

OSM Alloy Safety Eye Hooks

- Design Factor: 4 to 1.
- Fatigue tested
- Embossed with OSM, Traceability Code, WLL
- Proof Load at 2 times Working Load Limit



Type: HET


Alloy Chains Grade 80 Type: HET

WLL	C	D	F	G	J	K	M	N	Q
1T	85	72	31.8	18.5	22.9	16	16	9.14	19.1
1.5T	97	79	35.1	21.3	23.6	18	18	10.7	23.1
2T	105	89.5	38.1	25.4	25.4	22.4	22.4	14	28.7
3T	119	101	41.1	28.7	28.7	23.9	23.9	14.7	31.8
5T	147	122	51	36.6	37.3	33.3	33.3	18.3	39.6
7T	187	159	63.5	46	44.5	42.2	42.2	22.9	51
11T	230	189	76	57	58	47.8	41.4	28.2	62
15T	256	211	82.5	66	63.5	55.5	49.3	32.3	72


Alloy Chains

Alloy Chains are designed and manufactured for superior performance and usage. It can easy withstand more abuse, abrasion resistance, greater load lifting per size and lighter to handle during application.

- Material Alloy Steel, heat treated and proof tested
- Safety Factor 4:1
- Produced from High Quality Alloy Steel
- Tougher and more reliable for lifting application
- Minimize downtime operation and surpassing safety record for durability
- Finish: Self-colored
- Permanently Embossed with "OSM" marking for easy identification and traceability

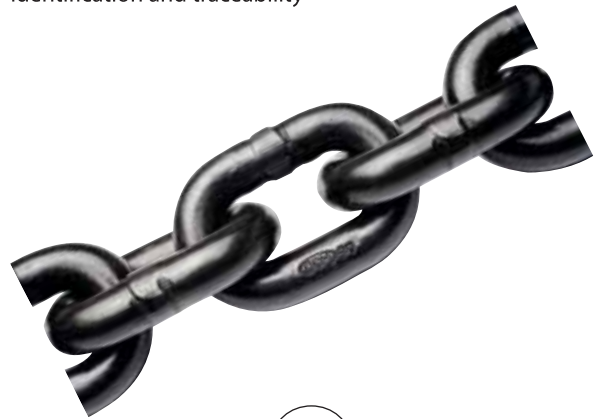

Type: CAL

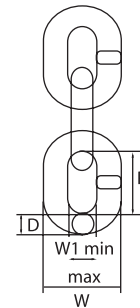

Alloy Chains Grade 80 Type: CAL

Product Code	Chain Dia D	Inside Length P	Outside Width W	Inside Width W1	Weight App KG per 100MTR	WLL 4:1 Ton
CAL 006	6.0	18	20.45	7.5	81	1.1
CAL 006A	6.3	19	21.48	7.9	90	
CAL 007	7.1	21	23.54	8.9	116	1.6
CAL 008	8.0	24	26.6	10	142	2.0
CAL 009	9.0	27	30.68	11.3	182	2.5
CAL 010	10.0	30	33.75	12.5	221	3.2
CAL 013	13.0	39	44	18	370	5.4
CAL 016	16.0	48	54	22	560	8.0