



Chain Slings and Accessories


Offering Safety Material

Screw Pin Dee Shackles

- U.S. Federal Specification RR-C-271D.
- Forged, quenched and tempered with alloy pin.
- Fatigue tested.
- Embossed with OSM Logo, Traceability Code & WLL.
- Proof Load at 2 times WLL.
- Ultimate Strength at 6 times WLL.



Type: SPD

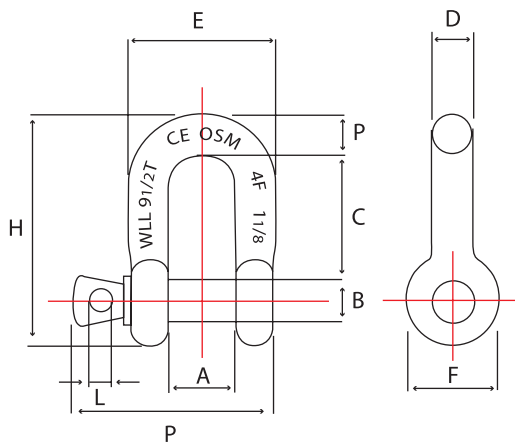

Forged Screw Pin Dee Shackle Type: SPD

Product Code	Nominal Size (in.)	WLL 6:1 Ton	Kg	Dimensions (mm)											Tolerance (+/-)	
				A	B	C	D	E	F	P	H	L	M	C	A	
SPD 004	3/16	1/3	0.02	10.00	6.30	5.00	5.00	20.00	14.50	19.50	37.25	3.50	37.25	1.50	1.50	
SPD 006	1/4	1/2	0.05	11.90	7.85	6.35	6.35	24.60	15.50	22.40	40.40	4.85	35.10	1.50	1.50	
SPD 008	5/16	3/4	0.08	13.50	9.65	7.85	7.85	29.50	19.10	26.20	48.50	5.60	42.20	1.50	1.50	
SPD 010	3/8	1	0.11	16.80	11.20	9.65	9.65	35.80	23.10	31.80	58.50	6.35	51.50	3.30	1.50	
SPD 011	7/16	1.1/2	0.18	19.10	12.70	11.20	11.20	41.40	26.90	36.60	67.50	7.85	60.50	3.30	1.50	
SPD 013	1/2	2	0.27	20.60	16.00	12.70	12.70	46.00	30.20	41.40	77.00	9.65	68.50	3.30	1.50	
SPD 016	5/8	3.1/4	0.55	26.90	19.10	15.70	16.00	58.50	38.10	51.00	95.50	11.20	85.00	3.30	1.50	
SPD 019	3/4	4.3/4	0.98	31.80	22.40	20.76	19.10	70.0	46.0	60.50	115.00	12.70	101.0	6.35	1.50	
SPD 022	7/8	6.1/2	1.43	36.60	25.40	24.60	22.40	81.0	53.0	71.50	135.0	12.70	114.0	6.35	1.50	
SPD 025	1	8.1/2	2.15	42.90	28.70	25.40	25.40	93.5	60.5	81.00	151.0	14.20	129.0	6.35	1.50	
SPD 028	1.1/8	9.1/2	3.06	46.00	31.80	31.80	28.70	103.0	68.5	91.0	172.0	16.00	142.0	6.35	1.50	
SPD 032	1.1/4	12	4.11	51.50	35.10	35.10	31.80	115.0	76.0	100.0	191.0	17.50	156.0	6.35	3.30	
SPD 035	1.3/8	13.1/2	5.28	57.00	38.10	38.10	35.10	127.0	84.0	111.0	210.0	19.10	174.0	6.35	3.30	
SPD 038	1.1/2	17	7.23	60.50	41.40	41.10	38.10	137.0	92.0	122.0	230.0	20.60	187.0	6.35	3.30	
SPD 044	1.3/4	25	12.13	73.00	51.00	54.00	44.50	162.0	106.0	146.0	279.0	25.40	231.0	6.35	3.30	
SPD 050	2	35	19.19	82.50	57.00	51.00	51.00	184.0	122.0	172.0	312.0	31.00	263.0	6.35	3.30	

www.marinehub.com