



## Chain Slings and Accessories


Offering Safety Material

### NHS Wire Rope Puller

- Virtually maintenance-free.
- Accurate operation, standard safety latch.
- High strength cast aluminium body, operated manually by engaging clutch and working the handle.
- Can be used in any position to lift, pull, lower or stretch heave loads.
- CE Certified



Type: NHS

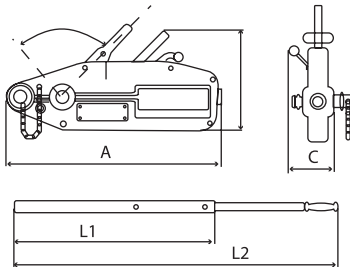

#### NHS Wire Rope Puller Specifications

Specifications Item Code	NHS 0.8T	NHS 1.6T	NHS 3.2T
Rated capacity	0.8TON	1.6TON	3.3TON
Rated forward handpower (N)	≤284	≤412	≤441
Rated forward travel (mm)	≥52	≥55	≥28
Rope diameter (mm)	8.3mm x 20 Mtr	11mm x 20 Mtr	16mm x 20 Mtr
Net Weight (kg)	6.0	11	22
Max. Overall Size A x B x C (mm)	428 x 65 x 260	545 x 97 x 260	660 x 116 x 320

### Trolleys

#### OSM GLT Plain Trolley


- Heavy duty design
- Rolled steel plate
- Nodular iron wheel with ball bearing
- Anti-corrosive paint

#### OSM GRT Geared Trolley

- Heavy duty design
- Rolled steel plate
- Nodular iron wheel with ball bearing
- Anti-corrosive paint



Type: GLT/GRT

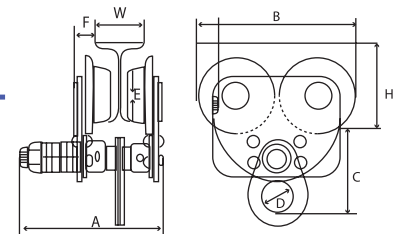

#### GLT Trolley Specifications

Item Code	Capacity (Tonne)	Fit Beams (mm)				Dimensions (mm)						Minimum Revolving Radius (mm)	N.W (Kg)
		W	H	Min	Max	A	B	C	D	E	F		
GLT 005	0.5	75	125	100	150	206	174	120	45	55	27	900	4.5
GLT 010	1	75	125	125	250	206	231	120	45	80	27	1000	7.5
GLT 015	1.5	75	125	125	250	206	231	120	45	80	27	1000	9.0
GLT 020	2	100	150	150	400	241	271	155	60	100	33	1100	11.5
GLT 030	3	100	150	180	400	261	311	185	70	113	47	1300	21.0
GLT 050	5	125	175	250	450	294	351	220	80	125	53	1400	30.5
GLT 100	10	150	175	250	450	294	721	165	90	125	53	1700	44

#### GRT Trolley with chain Specifications

Item Code	Capacity (Tonne)	Fit Beams (mm)				Dimensions (mm)						Minimum Revolving Radius (mm)	N.W (K.g)
		W	H	Min	Max	A	B	C	D	E	F		
GRT 005	0.5	75	125	100	150	206	174	120	45	55	27	900	5.3
GRT 010	1	75	125	125	250	206	231	120	45	80	27	1000	8.5
GRT 015	1.5	75	125	125	250	206	231	120	45	80	27	1000	10.0
GRT 020	2	100	150	150	400	241	271	155	60	100	33	1100	13.0
GRT 030	3	100	150	180	400	261	311	185	70	113	47	1300	18.5
GRT 050	5	125	175	250	450	294	351	220	80	125	53	1400	32.0
GRT 100	10	150	175	250	450	294	721	165	90	125	53	1700	46

