



Offering Safety Material

Hoisting Equipment



Single Thickness Webbing Sling




Double Thickness Webbing Sling



Double Thickness Webbing Sling with Steel Fittings



Single Thickness Endless Webbing Sling

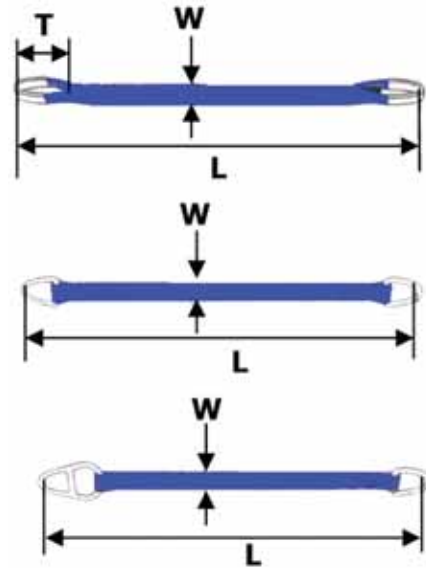

Duplex Webbing Slings Type WSD

Our Webbing Slings are manufactured in accordance with Machine Directive 98/79/EG from 100% Polyester Fibre and Color-coding to EN 1492-1.

For easy recognition and traceability all our Webbing Slings are color coded, identified with WLL and labeled. Working temperature range of -40°C to 100°C.

We can manufacture to any specified length with flat, folded eyes or steel terminals to meet customer's operational requirements and applications.

Please Note: Diagrams and pictures shown here are printed for convenience and do not represent any specific brand or maker.

Technical Data Mode Factors for limits in Kg	Color Code according to DIN EN 1492-1							
Product Code	Color	Straight Lift M (kg)	Choked Lift M = 0.8	'U' Lift M = 0.8	45 Deg Lift M = 1.4	60 Deg Lift M = 1.0	'W' Width (mm)	"T" Standard Eye Length
010	WLL 1 ton	1000	800	2000	1400	1000	25	300
020	WLL 2 ton	2000	1600	4000	2800	2000	50	300
030	WLL 3 ton	3000	2400	6000	4200	3000	75	400
040	WLL 4 ton	4000	3200	8000	5600	4000	100	400
050	WLL 5 ton	5000	4000	10000	7000	5000	125	450
060	WLL 6 ton	6000	4800	12000	8400	6000	150	600
080	WLL 8 ton	8000	6400	16000	11200	8000	200	600
100	WLL 10 ton	10000	8000	20000	14000	10000	250	900
120	WLL 12 ton	12000	9600	24000	16800	12000	300	900

www.marinehub.com