


Thimbles Commercial Standard Type TSC

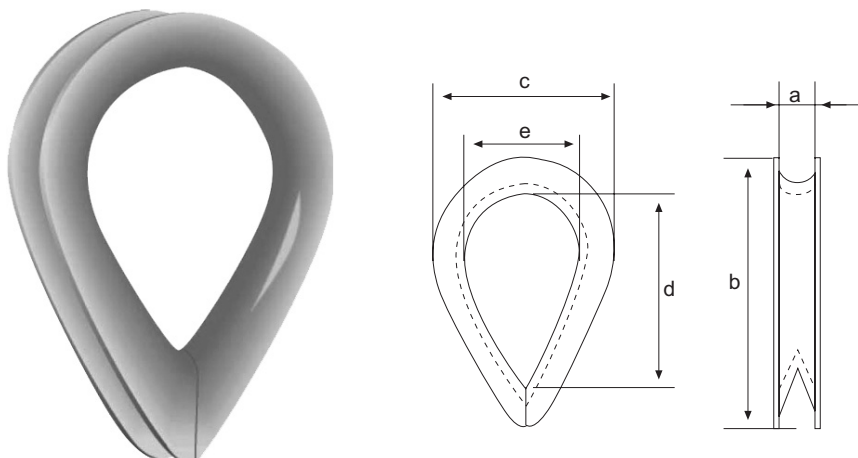

Thimbles are available in a variety of types and sizes. When ordering thimbles for use with wire rope always specify the method how the length is measured and determined. The most usual practice is to measure the length from bearing to bearing of the thimbles and is usually referred as 'useful length'.

- For stand applications for light duty and loading conditions
- Electro-galvanized Steel
- Give greater protection against wear and deformation of the wire rope eye
- Has much longer service life
- For greater protection and use in corrosive environments stainless steel thimbles are available

Thimbles Commercial Standard Type TSC

| Product Code | Rope Dia. (mm) | Width Groove a (mm) | Length b (mm) | Width c (mm) | Length d (mm) | Width Inside e (mm) | Weight per 100pcs (kg) |
|--------------|----------------|---------------------|---------------|--------------|---------------|---------------------|------------------------|
| 004 | 4 | 4 | 25.0 | 19.0 | 16.0 | 11.0 | 0.4 |
| 005 | 5 | 5 | 31.0 | 22.0 | 22.0 | 16.0 | 0.8 |
| 006 | 6 | 6 | 37.0 | 29.0 | 26.0 | 19.0 | 1.4 |
| 007 | 7 | 7 | 44.0 | 32.0 | 32.0 | 22.0 | 2.0 |
| 008 | 8 | 8 | 51.0 | 38.0 | 34.0 | 24.0 | 2.8 |
| 009 | 9 | 9 | 57.0 | 42.0 | 38.0 | 29.0 | 3.0 |
| 010 | 10 | 10 | 64.0 | 44.0 | 42.0 | 32.0 | 4.8 |
| 011 | 11 | 11 | 70.0 | 51.0 | 48.0 | 35.0 | 7.5 |
| 012 | 12 | 12 | 76.0 | 57.0 | 51.0 | 38.0 | 8.0 |
| 014 | 14 | 14 | 82.0 | 60.0 | 57.0 | 40.0 | 10.0 |
| 016 | 16 | 16 | 89.0 | 64.0 | 60.0 | 42.0 | 15.0 |
| 018 | 18 | 18 | 102 | 69.0 | 67.0 | 45.0 | 22.0 |
| 020 | 20 | 20 | 115 | 79.0 | 76.0 | 51.0 | 25.0 |
| 022 | 22 | 22 | 127 | 89.0 | 83.0 | 54.0 | 32.0 |
| 024 | 24 | 24 | 140 | 102 | 88.0 | 64.0 | 46.0 |
| 026 | 26 | 26 | 152 | 105 | 102 | 68.0 | 66.0 |
| 028 | 28 | 28 | 165 | 115 | 110 | 73.0 | 77.0 |
| 030 | 30 | 30 | 178 | 121 | 115 | 79.0 | 80.0 |
| 032 | 32 | 32 | 203 | 133 | 140 | 93.0 | 130 |